

## CLOSED LOOP HALL EFFECT CURRENT SENSOR


### JP-50/100




#### ELECTRICAL PROPERTIES

Model		JP-50	JP-100
Primary nominal current	If	50A	100A
Measuring resistance	R <sub>L</sub>	V <sub>cc</sub> =±12V @ ±50A : 60Ω ~ 95Ω @ ±60A : 60Ω V <sub>cc</sub> =±15V @ ±50A : 135Ω ~ 155Ω @ ±55A : 135Ω	V <sub>cc</sub> =±12V @ ±100A : 0Ω ~ 42Ω @ ±120A : 0Ω ~ 14Ω V <sub>cc</sub> =±15V @ ±100A : 20Ω ~ 102Ω @ ±150A : 20Ω ~ 25Ω
Rated output current	I <sub>o</sub>	50mA ( Turn ratio 1 : 1000)	50mA ( Turn ratio 1 : 2000)
Output current accuracy	V	±0.45 (±15V, +25°C)	±0.65 (±15V, +25°C)
Offset current	I <sub>of</sub>	≤ ±0.1mA (at If=0A)	≤ ±0.2mA (at If=0A)
Output linearity	ε <sub>L</sub>	≤ ±0.15% (at If)	≤ ±0.15% (at If)
Power supply voltage	V <sub>cc</sub>	±12V ±5% ~ ±15V ±5% (Ratad output current is restricted by V <sub>cc</sub> )	
Response time	t <sub>r</sub>		≤ 1μS(at di/dt=If/μs)
Frequency characteristics	f		DC...200kHz (-1 dB)
Thermal drift of gain	TCl <sub>o</sub>		≤ ± 0.01%/°C(Without Tclof)
Thermal drift of offset	TCl <sub>of</sub>		≤ ± 0.5mA
Hysteresis error	I <sub>oh</sub>		≤ 0.3mA (at If=0A → If → If=0A)
Insulation voltage	V <sub>D</sub>		AC3000V for 1 minute (Sensing current 0.5mA) inside of through hole ⇔ terminal
Insulation resistance	R <sub>is</sub>		≥500MΩ (at DC500V) inside of through hole ⇔ terminal
Ambient Operating temperature	T <sub>A</sub>		-40°C ~ +85°C
Ambient storage temperature	T <sub>s</sub>		-40°C ~ +90°C
Secondary coil resistance	R <sub>s</sub>	80Ω(@Ta=70°C) 85Ω(@Ta=85°C)	120Ω(@Ta=70°C) 128Ω(@Ta=85°C)

#### DIMENSION

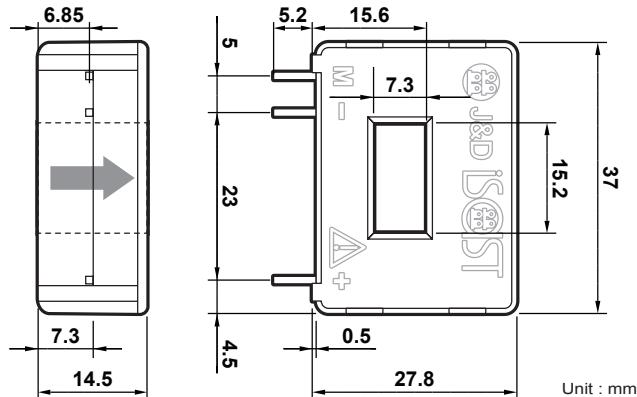

#### CONNECTION

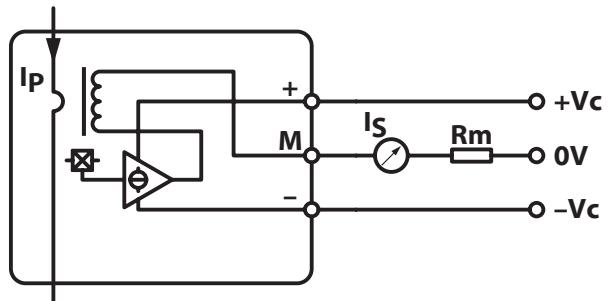

Unless otherwise specified,  
tolerances shall be ±0.5mm